



ROOLF®



**04**  
Stone Series



**05**  
Wood Series



**08**  
Laying Patterns



**10**  
Technical Specifications



**12**  
Contact Roof




**ROOLF**


Roof provides a great variety of floorings to meet with the latest design trends. It gives you a dedicated and user friendly commercial & residential resilient flooring. This fashionable flooring with broad scope of designs and rich colors synchronize with any style.

STONE SERIES


WOOD SERIES




Affogato




Americiano



Cappuccino




Cortado




Flat White



Irish



Latte



Mocha

| Product Name | Product Code | Size      | Catagory |
|--------------|--------------|-----------|----------|
| Affogato     | LF - 20      | 12" x 24" | Stone    |
| Americano    | LF - 33      | 12" x 24" | Stone    |
| Cappuccino   | LF - 30      | 12" x 24" | Stone    |
| Cortado      | LF - 32      | 12" x 24" | Stone    |
| Flat White   | LF - 27      | 12" x 24" | Stone    |
| Irish        | LF - 34      | 12" x 24" | Stone    |
| Latte        | LF - 29      | 12" x 24" | Stone    |
| Mocha        | LF - 28      | 12" x 24" | Stone    |



Berlin




Florence



Madrid




Milan

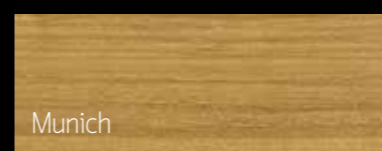

Munich



Valencia

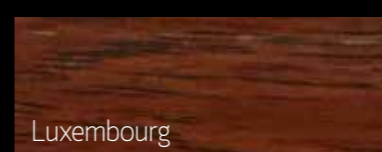

Luxembourg




Finland




Switzerland



Sweden



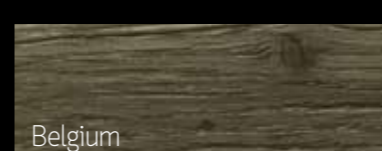


Belgium

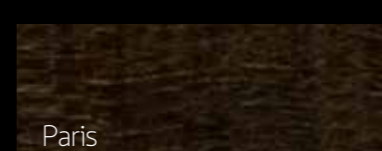

Paris

| Product Name | Product Code | Size                    | Catagory |
|--------------|--------------|-------------------------|----------|
| Berlin       | LF - 10      | 7.25" x 48" or 6" x 48" | Wood     |
| Florence     | LF - 13      | 7.25" x 48" or 6" x 48" | Wood     |
| Madrid       | LF - 17      | 7.25" x 48" or 6" x 48" | Wood     |
| Milan        | LF - 18      | 7.25" x 48" or 6" x 48" | Wood     |
| Munich       | LF - 19      | 7.25" x 48" or 6" x 48" | Wood     |
| Valencia     | LF - 26      | 7.25" x 48" or 6" x 48" | Wood     |
| Luxembourg   | LF - 51      | 7.25" x 48" or 6" x 48" | Wood     |
| Finland      | LF - 52      | 7.25" x 48" or 6" x 48" | Wood     |
| Switzerland  | LF - 53      | 7.25" x 48" or 6" x 48" | Wood     |
| Sweden       | LF - 54      | 7.25" x 48" or 6" x 48" | Wood     |
| Belgium      | LF - 55      | 7.25" x 48" or 6" x 48" | Wood     |
| Paris        | LF - 56      | 7.25" x 48" or 6" x 48" | Wood     |

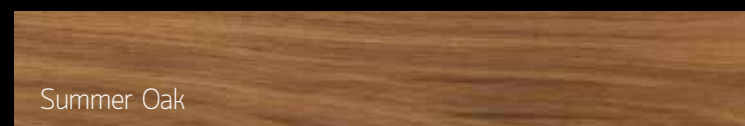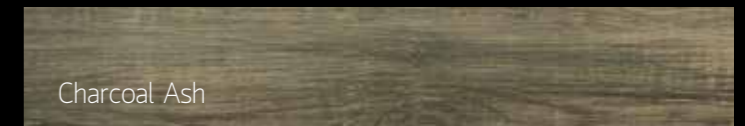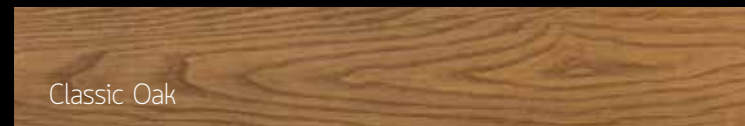

| Product Name | Product Code | Size                    | Catagory |
|--------------|--------------|-------------------------|----------|
| Classic Oak  | W5J5205RF    | 7.25" x 48" or 6" x 48" | Wood     |
| Royal Oak    | W5J4601RF    | 7.25" x 48" or 6" x 48" | Wood     |
| Rustic Pine  | W5J5106RF    | 7.25" x 48" or 6" x 48" | Wood     |
| Spring Oak   | W5J5309RF    | 7.25" x 48" or 6" x 48" | Wood     |
| Summer Oak   | W5J5308RF    | 7.25" x 48" or 6" x 48" | Wood     |
| Worn Pine    | W5J3009RF    | 7.25" x 48" or 6" x 48" | Wood     |


| Product Name   | Product Code | Size                    | Catagory |
|----------------|--------------|-------------------------|----------|
| Brown Oak      | W5J5301RF    | 7.25" x 48" or 6" x 48" | Wood     |
| Charcoal Ash   | W5J5404RF    | 7.25" x 48" or 6" x 48" | Wood     |
| Smoked Oak     | W5J5310RF    | 7.25" x 48" or 6" x 48" | Wood     |
| Vintage Autumn | W5J5001RF    | 7.25" x 48" or 6" x 48" | Wood     |
| Vintage Wood   | W5J4809RF    | 7.25" x 48" or 6" x 48" | Wood     |
| Winter Classic | W5J5311RF    | 7.25" x 48" or 6" x 48" | Wood     |

# LAYING PATTERNS


Discover the beautiful laying patterns of Roof. Create your unique floor with limitless possibilities.




Broken Bond (Available for Stone Series only)

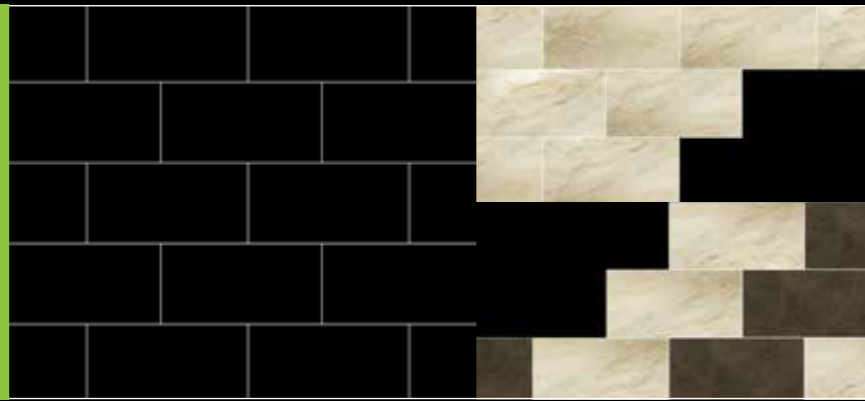

Cross Grain

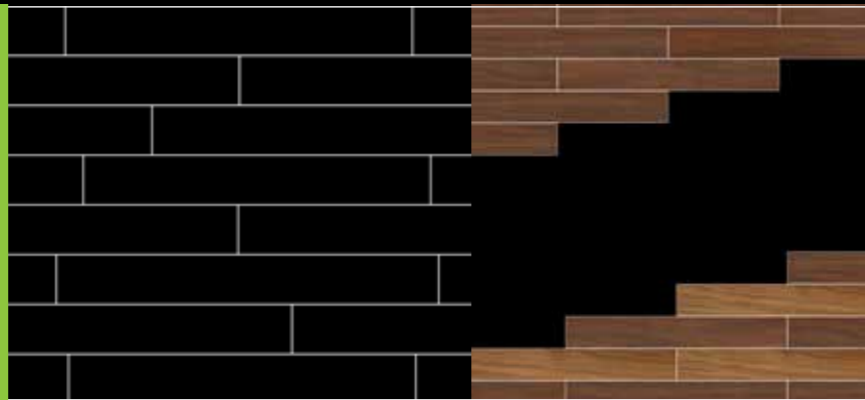

Herringbone

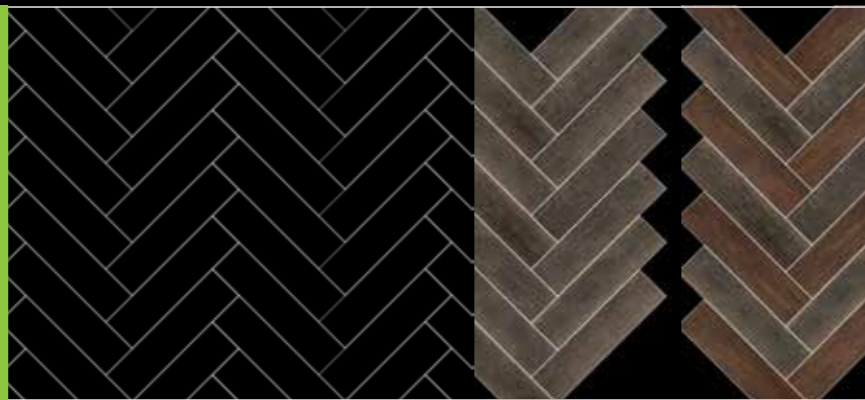

Herringbone Pleat




# LAYING PATTERNS


Discover the beautiful laying patterns of Roof. Create your unique floor with limitless possibilities.



Horizontal Arrow

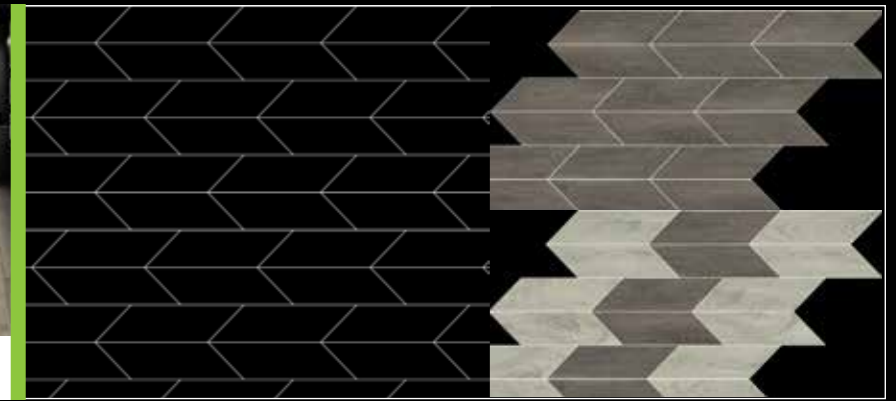

Liner Block

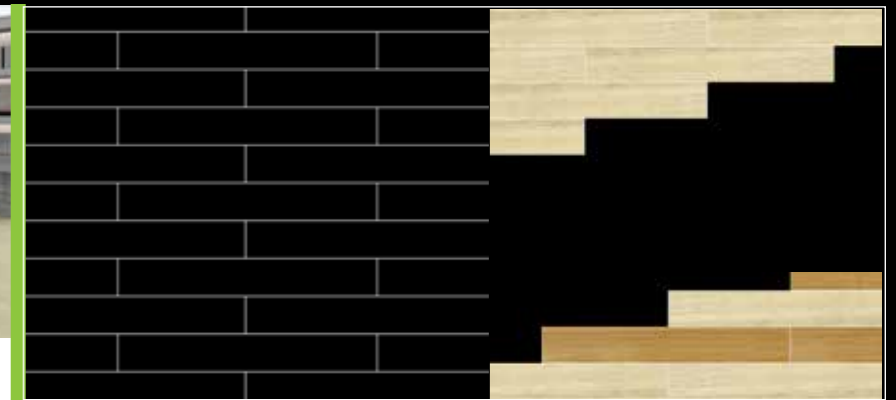


Stone



## MORE PATTERNS



Apollo



Origami



Rattam

# TECHNICAL SPECIFICATIONS

| Product Name | Standard                          | Result  |
|--------------|-----------------------------------|---|
| STONE SERIES | Size                              | Stone: 12" x 24"<br>Wood: 6" x 48" / 7.25" x 48"                              |
|              | Thickness                         | 3.0 mm  |
|              | Wear Layer                        | Stone: 0.55 mm or 0.3 mm<br>Wood: 0.55mm or 1.0 mm                            |
|              | K Guard+ (PU) Surface Protection  | Yes   |
|              | Warranty                          | Commercial<br>Residential   |
|              | Beveled Edge                      | Yes   |
|              | Type of Floorcovering             | Heterogeneous PVC   |
|              | Classification                    | 43: Light Industrial Heavy<br>34: Commercial Very Heavy<br>23: Domestic Heavy |
|              | Reaction to Fire                  | EN 13501-1<br>EN ISO 9239-1<br>EN ISO 11925-2                                 |
|              | Slip Resistance                   | R9  |
| WOOD SERIES  | Staining Resistance               | Class 0   |
|              | Light Fastness                    | Pass 6 or better  |
|              | Abrasion Resistance               | Group P   |
|              | Dimensional Stability             | ≤0.25%  |
|              | Acoustic Impact Noise Reduction   | EN ISO 717-2<br>EN ISO 140-8  |
|              | Electrical Behaviour Body Voltage | Pass  |
|              | Indentation Residual              | ≤0.1mm  |
|              | Castor Chair Continuous Use       | Pass  |
|              | Thermal Conductivity              | ISO 8302  |
|              | Recycling                         | Suitable  |
| STONE SERIES | Migration of Certain Elements     | EN 71-3: 1944<br>Including amendment A1: 2000 / AC: 2002                      |
|              | VOCs                              | ISO 6000 - 6.9  |
|              | Thermal Conductivity              | 0.0147m2K/W<br>Suitable for underfloor heating.<br>Max 27°C.                  |

# TECHNICAL SPECIFICATIONS

| Product Name | Standard                                       | Result  | Result   |
|--------------|--|---|--|
| WOOD SERIES  | Manufacturing Standard                         | EN 649<br>ASTMF1700                             | Pass   |
|              | Weight   | EN 430  | 5320g/m²   |
|              | Total Thickness                                | EN 428<br>ASTMF386                              | 3.0 mm   |
|              | Wear Layer Thickness                           | EN 429  | 0.55 mm  |
|              | Warranty                                       | -   | Commercial<br>Residential  |
|              | Wear Group Classification                      | EN 685  | 23, 33, 42   |
|              | Residual Indentation                           | EN 433, ASTM1700-99,<br>ASTMF1914               | ≤0.10 mm Pass  |
|              | Chemical Resistance                            | EN 423, DIN 51958,<br>ASTM F925                 | Excellent  |
|              | Toxicity                                       | EN 71   | Non-toxic  |
|              | Emissions                                      | CDPH section 01350,<br>French AFSSET, DIBt/AgBB | Pass   |
| WOOD SERIES  | Abrasion Resistance                            | EN 660  | Group P  |
|              | Slip Resistance                                | DIN 51130, EN 13893,<br>ASTM D2047-99           | R 9, Class DS<br>≥0.3 (dry coefficient of friction)<br>ADA Compliant |
|              | Castor Chair Resistance                        | EN 425<br>ASTM F-137                            | Pass   |
|              | Flexibility                                    | EN 435<br>ASTM F-137                            | Pass   |
|              | Curl   | EN 434  | √ ≤2.00 mm   |
|              | Dimensional Stability                          | EN 434, ASTM1700-99,<br>ASTMF2199               | 0.25%  |
|              | Dimension Squareness and Straightness          | EN 427  | Pass   |
|              | Sound Reduction                                | DIN 52210<br>ISO 140/717                        | 8 dB   |
|              | Light Stability                                | ISO 105 B02, ASTM F 925,<br>ASTMF1515           | ≥6 or better Exceeds requirements                                    |
|              | Flammability, Fire Resistance, Smoke Emissions | DIN 4102, ASTM E648<br>EN13501-1, ASTM E662     | Bf1 -S1, Class 1, <450   |
| WOOD SERIES  | Thermal Resistance                             | DIN 52612<br>EN 12667                           | 0.026km²/W   |
|              | Resistance to Heat                             | ASTM 1514                                       | Pass   |
|              | Underfloor Heating                             |   | Suitable for underfloor heating.<br>Max Temperature 28°C             |
|              | Volatile Organic Compounds (VOCs)              | ISO 16000-Part 6 / Part 9                       | Pass   |



ROOLF®

Tel: 852.2575.6262

Fax: 852.2575.6894

Email: [enquiry@roofloor.com](mailto:enquiry@roofloor.com)

Address: 32/F, Global Trade Square, 21 Wong Chuk Hang Road, Hong Kong